
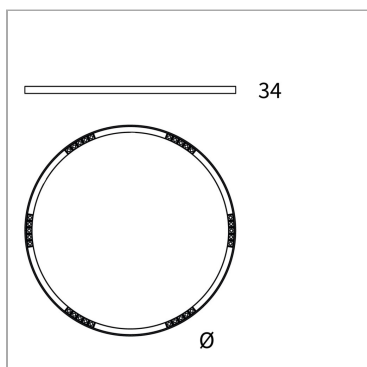


File Flex Circle "O" outdoor Spot suspension

code FXG53.930S/01

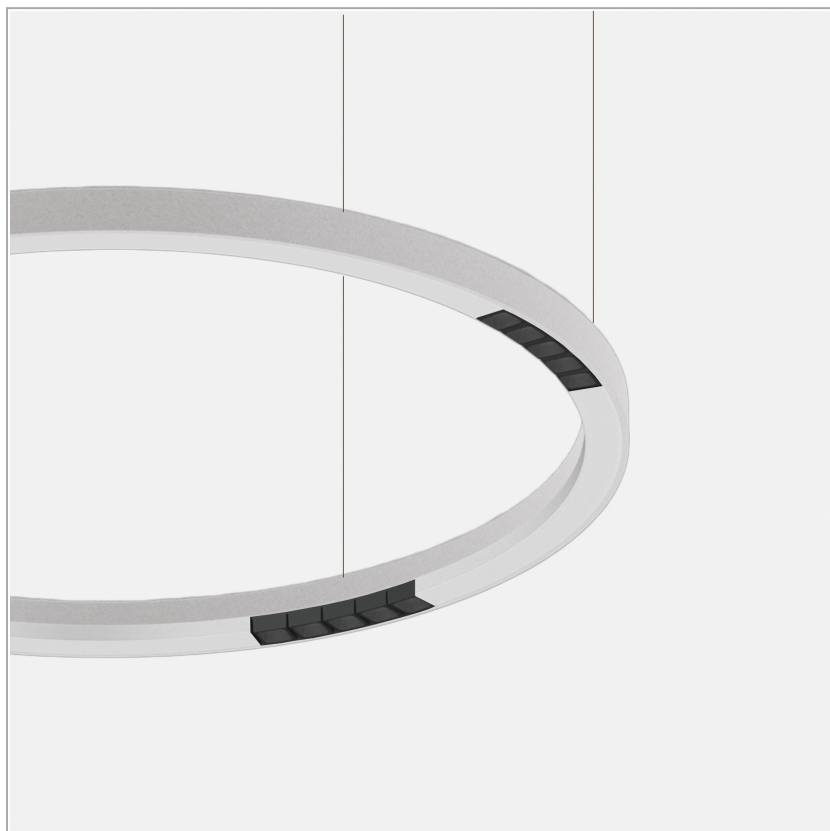

PRODUCT DESCRIPTION

Circular outdoor ceiling light made of extruded aluminium 6060, direct light emission, complete with 30 LEDs 66 W, colour rendering index CRI>90. Transparent round cross-section power cable; steel suspension cables with millimetric adjuster; Epoxy powder coating; Micro textured white colour finish.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	30x2,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White
Luminous flux of the product	6510 lm
Luminous efficiency	99 lm/W
MacAdam color tolerance	3
Life time estimate	60.000H L80 B10
Energy efficiency class	D
Weight	4.7 Kg
Dimension	Ø1000 mm
IP Grade	IP65 / Ip66
Protection Class	Class III appliance

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1