
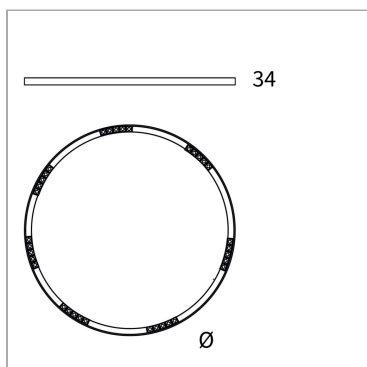


## File Flex Circle "O" outdoor Spot suspension

code FXG54.940F/01

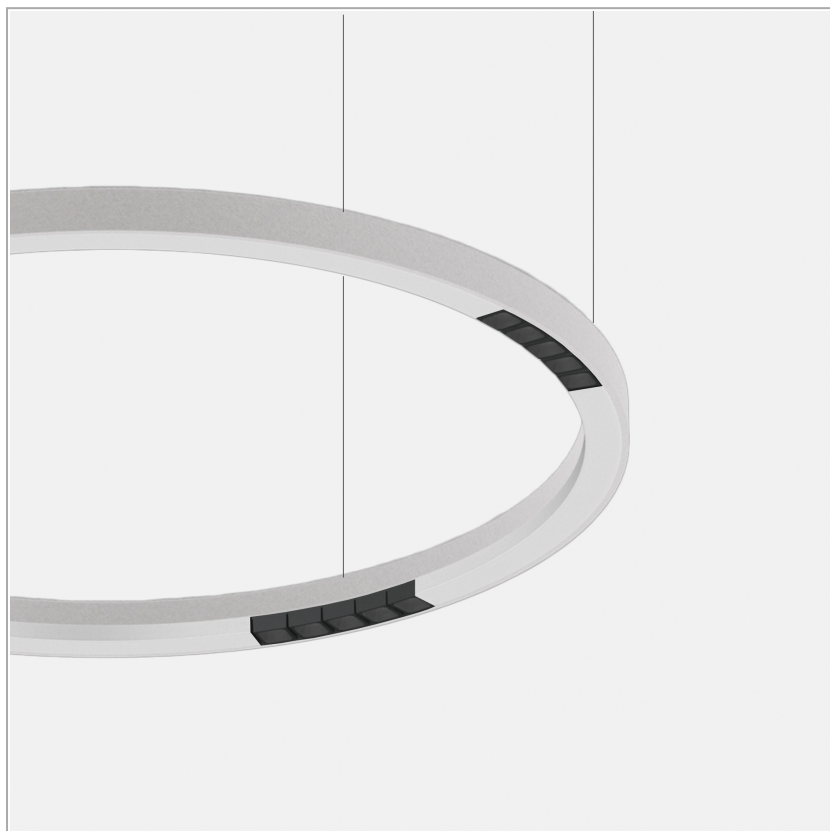

### PRODUCT DESCRIPTION

Circular outdoor ceiling light made of extruded aluminium 6060, direct light emission, complete with 35 LEDs 77 W, colour rendering index CRI>90. Transparent round cross-section power cable; steel suspension cables with millimetric adjuster; Epoxy powder coating; Micro textured white colour finish.

### PRODUCT SPECS

|                              |                     |
|------------------------------|---------------------|
| Installation method          | Suspension          |
| Light source                 | LED                 |
| Absorbed power               | 35x2,2 W            |
| Color temperature            | 4000K               |
| Color rendering index CRI    | >90                 |
| Optic                        | Flood 32°           |
| Finishing                    | White               |
| Luminous flux of the product | 7770 lm             |
| Luminous efficiency          | 101 lm/W            |
| MacAdam color tolerance      | 3                   |
| Life time estimate           | 60.000H L80 B10     |
| Energy efficiency class      | D                   |
| Weight                       | 5.8 Kg              |
| Dimension                    | Ø1200 mm            |
| IP Grade                     | IP65 / Ip66         |
| Protection Class             | Class III appliance |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1