




## Manine diffused 90-V monovertical emission

code MN005.930/01

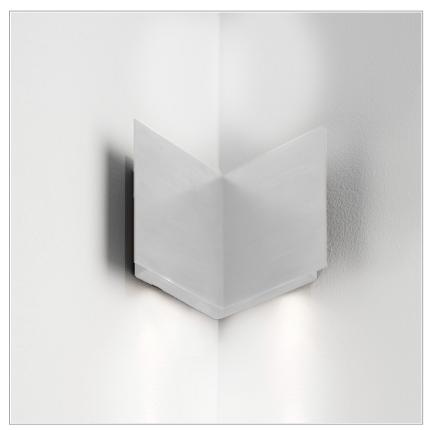



















## PRODUCT DESCRIPTION

Indoor luminaire for indoor corner, single-emission for diffuse lighting. Complete optical assembly with professional LED sources 13 W, complete with ballast. 90° internal corner version with 120x120 mm metal body, 30 mm wall projection white. IP40 degree of protection.

## **PRODUCT SPECS**

Installation method	Wall surface mounted
Light source	LED
Absorbed power	13 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	690 lm
Luminous efficiency	53 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	A
Weight	1.78 Kg
Dimension	L120xH120 mm
IP Grade	IP40
Product Spec	Square shape
Power supply	220-240V 50-60Hz

**WEB PAGE** 



**ASSEMBLY** 



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.