

## App-eal 2 400mA

code APEB3.927/01





### PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Wall surface mounted   |
| Light source                 | Led                    |
| Absorbed power               | 19 W                   |
| Color temperature            | 2700K                  |
| Color rendering index CRI    | >90                    |
| Finishing                    | White                  |
| Luminous flux of the product | 2600 lm                |
| Luminous efficiency          | 137 lm/W               |
| Life time estimate           | 50000h L90 B10 Ta 25°C |
| Energy efficiency class      | D                      |
| Dimension                    | L310xW100xH110 mm      |
| IP Grade                     | IP40                   |
| Protection Class             | Class III appliance    |
| Power supply/Transformer     | Not included           |
| Protocol                     | See power supply       |

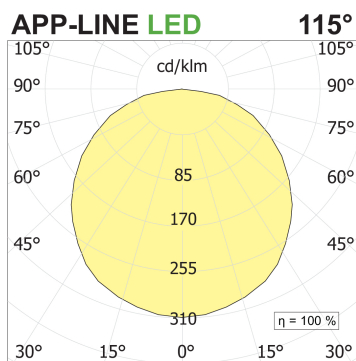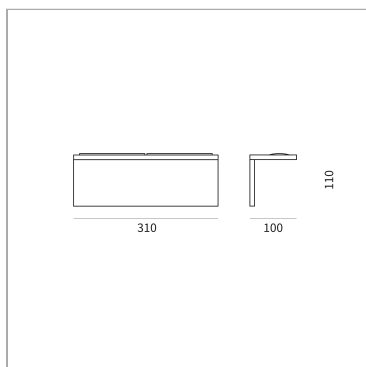

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### **AE700.32C1.MP (Copia)**



code AE700.30C.MP

Electronic power supply current

Technical Sheet

