

## Ibrida ground light 1 spot direct

code IB001.930SD/01





### PRODUCT DESCRIPTION

Floor lamp h 2200 complete with command module and base 220x220 mm. The body is composed of an extruded aluminum profile. Complete with 1 power projector [power]. Power supply included. Color finish [finish]. Protection class IP20.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Floor                |
| Light source                 | LED                  |
| Absorbed power               | 8 W                  |
| Color temperature            | 3000K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Spot 19°             |
| Finishing                    | White                |
| Luminous flux of the product | 665 lm               |
| Luminous efficiency          | 83 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 25000h L90 B10 ta25° |
| Protocol                     | Dimmable Dali        |
| Energy efficiency class      | D                    |
| Dimension                    | L220x220xH2200 mm    |
| IP Grade                     | IP20                 |
| Power supply                 | 220-240V 50-60Hz     |

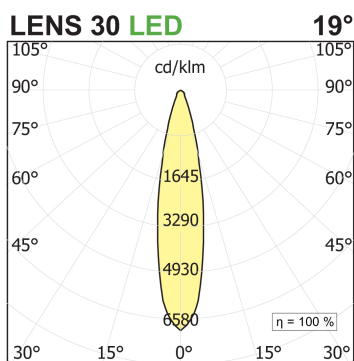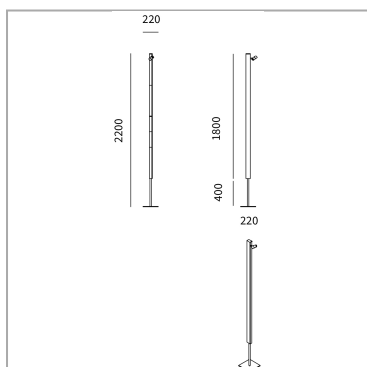

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



