

Ibrida ground light 1 spot direct

code IB001.935ZD/01




PRODUCT DESCRIPTION

Floor lamp h 2200 complete with command module and base 220x220 mm. The body is composed of an extruded aluminum profile. Complete with 1 power projector [power]. Power supply included. Color finish [finish]. Protection class IP20.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	8 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Asymmetric 41°X18°
Finishing	White
Luminous flux of the product	517 lm
Luminous efficiency	65 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L220x220xH2200 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

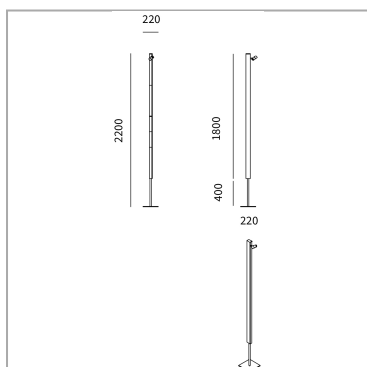

WEB PAGE



ASSEMBLY INSTRUCTIONS



