

## Corona 2 spots for support

code CR004.930SD/01





## PRODUCT DESCRIPTION

Free-standing fixture for direct lighting. Horizontal installation and complete with professional LED sources. Metal product with painted finish. IP40 degree of protection.

## PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Light source                 | LED                             |
| Absorbed power               | 2x24,3 W                        |
| Color temperature            | 3000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Spot 15°                        |
| Finishing                    | White                           |
| Luminous flux of the product | 6366 lm                         |
| Luminous efficiency          | 131 lm/W                        |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>ta 25°C |
| Protocol                     | Dimmable Dali                   |
| Energy efficiency class      | E                               |
| Dimension                    | L500 Ø90 mm                     |
| IP Grade                     | IP20                            |
| Power supply                 | 220-240V 50-60Hz                |

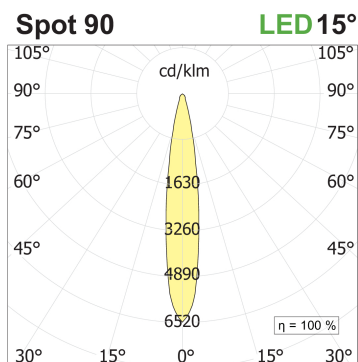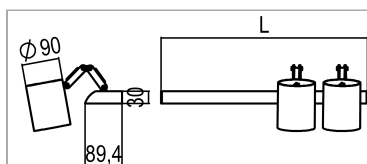

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 2

