

Corona 2 spots for support

code CR004.935SD/01





PRODUCT DESCRIPTION

Free-standing fixture for direct lighting. Horizontal installation and complete with professional LED sources. Metal product with painted finish. IP40 degree of protection.

PRODUCT SPECS

Light source	LED
Absorbed power	2x24,3 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	6462 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L500 Ø90 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

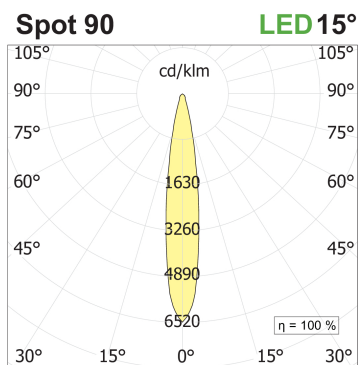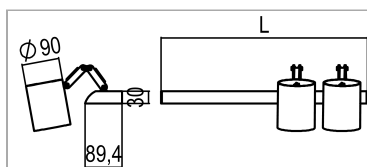

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

