



## code IB026.930F/01

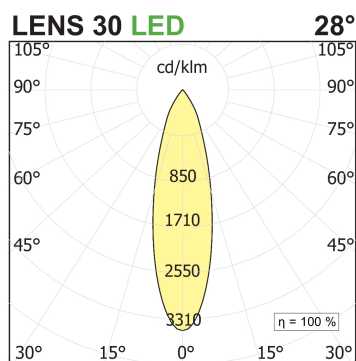


Lamp wall h 1800 mm. composed of an extruded aluminum profile. 2 led spot 16 W each. Power supply included. Color finish white. Protection class IP20.

|                              |                          |
|------------------------------|--------------------------|
| Installation method          | Wall surface mounted     |
| Light source                 | LED                      |
| Absorbed power               | 2x8 W                    |
| Color temperature            | 3000K                    |
| Color rendering index CRI    | >90                      |
| Optic                        | Flood 28°                |
| Finishing                    | White                    |
| Luminous flux of the product | 1390 lm                  |
| Luminous efficiency          | 87 lm/W                  |
| MacAdam color tolerance      | 2                        |
| Life time estimate           | 25000h L90 B10<br>at 25° |
| Protocol                     | On/Off                   |
| Energy efficiency class      | D                        |
| Dimension                    | L40xW126xH1800 mm        |
| IP Grade                     | IP20                     |
| Power supply                 | 220-240V 50-60Hz         |

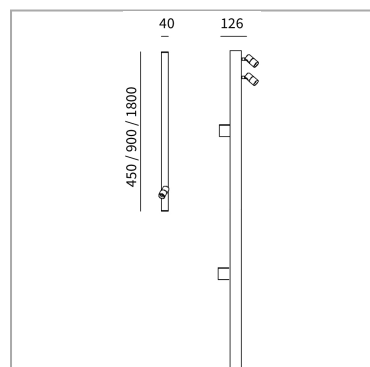

## OPTIONAL ACCESSORIES

### Ibrida Command Module



code IB100/01

Light switch and dimming accessory module that allows you to control the switching on, switching off and intensity of the light itself, directly on the product.

Technical Sheet

