

**Ibrida wall 1800 2 spots**

code IB026.940S/01





## PRODUCT DESCRIPTION

Lamp wall h 1800 mm. composed of an extruded aluminum profile. 2 led spot 16 W each. Power supply included. Color finish white. Protection class IP20.

## PRODUCT SPECS

|                              |                                |
|------------------------------|--------------------------------|
| Installation method          | Wall surface mounted           |
| Light source                 | LED                            |
| Absorbed power               | 2x8 W                          |
| Color temperature            | 4000K                          |
| Color rendering index CRI    | >90                            |
| Optic                        | Spot 19°                       |
| Finishing                    | White                          |
| Luminous flux of the product | 1350 lm                        |
| Luminous efficiency          | 84 lm/W                        |
| MacAdam color tolerance      | 2                              |
| Life time estimate           | 2SCDM 50.000h L90 B10<br>ta25° |
| Protocol                     | On/Off                         |
| Energy efficiency class      | D                              |
| Dimension                    | L40xW126xH1800 mm              |
| IP Grade                     | IP20                           |
| Power supply                 | 220-240V 50-60Hz               |

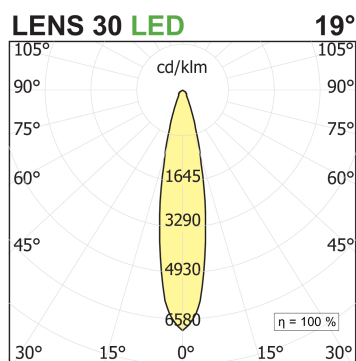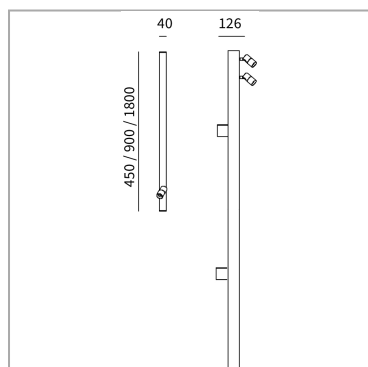

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS




Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 2

## OPTIONAL ACCESSORIES

### Ibrida Command Module



code IB100/01

Light switch and dimming accessory module that allows you to control the switching on, switching off and intensity of the light itself, directly on the product.

Technical Sheet

