

## Bucolica spot 26

code BU000.927F/02




### PRODUCT DESCRIPTION

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Floor                |
| Light source                 | LED                  |
| Absorbed power               | 2,2 W                |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Flood 27°            |
| Finishing                    | Black                |
| Luminous flux of the product | 215 lm               |
| Luminous efficiency          | 98 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 50000h Ta 25° L90B10 |
| Energy efficiency class      | E                    |
| Dimension                    | L53xH67 Ø26 mm       |
| IP Grade                     | Ip66                 |
| Protection Class             | Class III appliance  |
| Power supply/Transformer     | Not included         |
| Protocol                     | See power supply     |

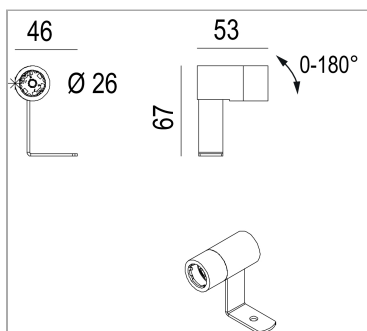

### WEB PAGE



## MANDATORY ACCESSORIES

### AE700.14IP



code AE700.14IP

Electronic power supply current

### AE500.22IP (Copia)



code AE500.14IP

Electronic power supply current

## OPTIONAL ACCESSORIES

### Oblique cut cover Ø26



code BU026/02

Cover accessory for Bucolica 26, diam. 29, oblique cut.

Technical Sheet



### Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



