

Bucolica spot 26

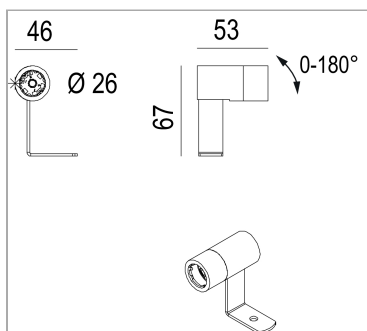
code BU001.927F/02

**PRODUCT DESCRIPTION**

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	5,7 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	Black
Luminous flux of the product	566 lm
Luminous efficiency	99 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	L53xH67 Ø26 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

**WEB PAGE**

MANDATORY ACCESSORIES

AE700.14IP



code AE700.14IP

Electronic power supply current

AE500.22IP (Copia)



code AE500.14IP

Electronic power supply current

OPTIONAL ACCESSORIES

Oblique cut cover Ø26



code BU026/02

Cover accessory for Bucolica 26, diam. 29, oblique cut.

Technical Sheet



Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



