

Bucolica spot 60

code BU004.935F/02





PRODUCT DESCRIPTION

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	6,7 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	Black
Luminous flux of the product	664 lm
Luminous efficiency	99 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Dimension	L62xH87 Ø60 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

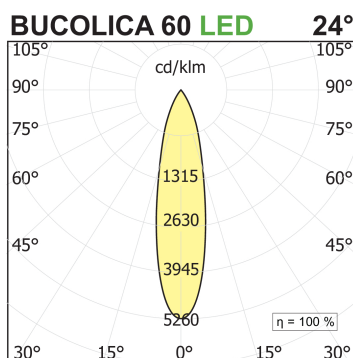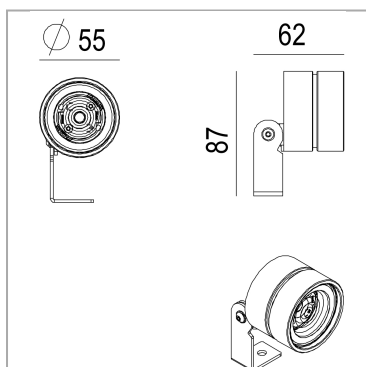

WEB PAGE



MANDATORY ACCESSORIES

AE700.14IP (Copia)




code AE700.12IP

Electronic power supply current

OPTIONAL ACCESSORIES

Oblique cut cover Ø60



code BU028/02

Cover accessory for Bucolica 60, diam. 64, oblique cut.

Technical Sheet



Straight cut cover Ø60



code BU030/02


Accessory for Bucolica diameter 60.

Technical Sheet



Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



