

Bucolica spot 120

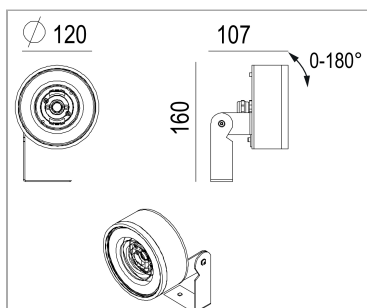
code BU005.940W/02

**PRODUCT DESCRIPTION**

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and it is adjustable for tilting up to a maximum of 180°.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 39°
Finishing	Black
Luminous flux of the product	1841 lm
Luminous efficiency	102 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Energy efficiency class	D
Dimension	L107xH160 Ø120 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

**WEB PAGE**

MANDATORY ACCESSORIES

AE500.22IP



code AE500.22IP

Electronic power supply current

OPTIONAL ACCESSORIES

Oblique cut cover Ø120



code BU029/02

Accessorio cover per Bucolica 120, diam. 124, taglio obliquo.

Technical Sheet



Straight cut cover Ø120



code BU031/02

Accessory for Bucolica diameter 120.

Technical Sheet



Short picket

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



