



code CR008.935S/01

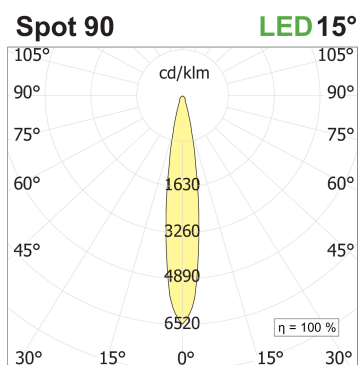

Wall-mounted fixture for direct lighting. Wall installation and complete with professional LED sources. Metal product with painted finish. IP40 degree of protection.

Installation method	Wall surface mounted
Light source	LED
Absorbed power	2x32 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	7990 lm
Luminous efficiency	125 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	On/Off
Dimension	L500 Ø90 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

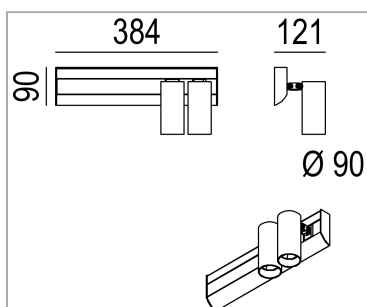