

IFerrosi straight pole H3300-120

code IF08.935F/99





PRODUCT DESCRIPTION

Outdoor floor lamp consisting of a tubular H3197 mm. Base diameter 450 mm, complete with Ø120 spot. colour rendering index cri>90. Painted finish. IP66 degree of protection.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	18 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	Graphite
Luminous flux of the product	2394 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	16.5 Kg
Dimension	L450xW760xH3197 Ø120 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

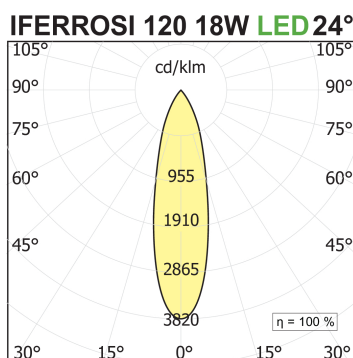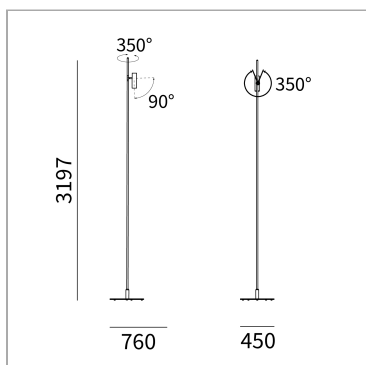

WEB PAGE



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

AE500.20C1




code AE500.20C1

Electronic power supply current

OPTIONAL ACCESSORIES

box-for-power-suppliers IFerrosi system



code IF76/99

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

Technical Sheet

