


File H system- Spot indirect

code FR044.940FD/01

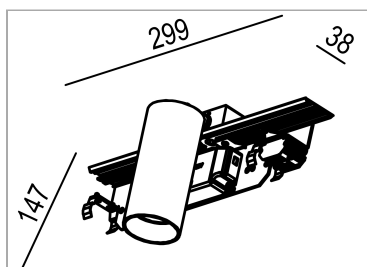

PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 120x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, suspended. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20 or IP40 protection rating.

Dimmable Dali / Touch & Dimm

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1450 lm
Luminous efficiency	121 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	D
Weight	0.75 Kg
Dimension	L300xW38xH147 Ø55 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS

