


## File H system- Spot indirect

code FR045.927WD/01

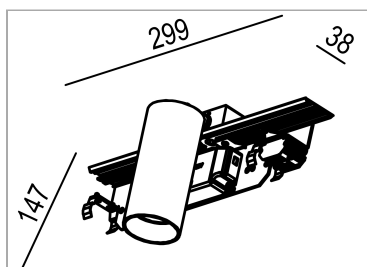

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 120x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, suspended. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20 or IP40 protection rating.

Dimmable Dali / Touch & Dimm

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | system                       |
| Light source                 | LED                          |
| Absorbed power               | 18 W                         |
| Color temperature            | 2700K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Wide 46°                     |
| Finishing                    | White                        |
| Luminous flux of the product | 1620 lm                      |
| Luminous efficiency          | 90 lm/W                      |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 50000h Ta 25° L80 B10        |
| Protocol                     | Dimmable Dali / Touch & Dimm |
| Energy efficiency class      | E                            |
| Weight                       | 0.75 Kg                      |
| Dimension                    | L300xW38xH147 Ø55 mm         |
| IP Grade                     | IP20                         |
| Power supply                 | 220-240V 50-60Hz             |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

