

## Mini Ibrida parete H2300 + 4 spots e indiretta

code MIB034.927F/01





### PRODUCT DESCRIPTION

Wall lamp H 2345mm. Characterized by an extruded aluminium profile of 30 x 30 mm. Provided with two supports for mounting on the wall. Complete with linear led source for indirect light 17 W + 4 spots tot 22.8 W. Color finish white. Protection class IP20.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Light source                 | LED                             |
| Absorbed power               | 4x5,7 W / 17 W                  |
| Color temperature            | 2700K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Flood 27°                       |
| Finishing                    | White                           |
| Luminous flux of the product | 2536 lm                         |
| Luminous efficiency          | 111 lm/W                        |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | On/Off                          |
| Energy efficiency class      | E                               |
| Dimension                    | L30xW60xH2345 mm                |
| IP Grade                     | IP20                            |

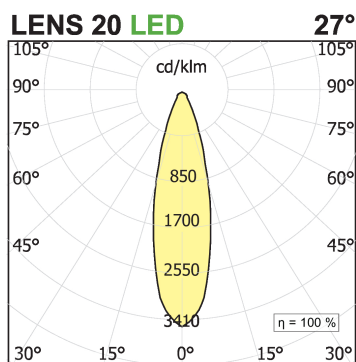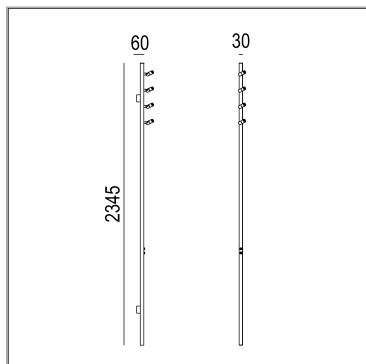

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

