


## TRANSPARENT POWER CABLE KIT WITH WHITE CEILING CANOPY

code LT2412.5.4000/01

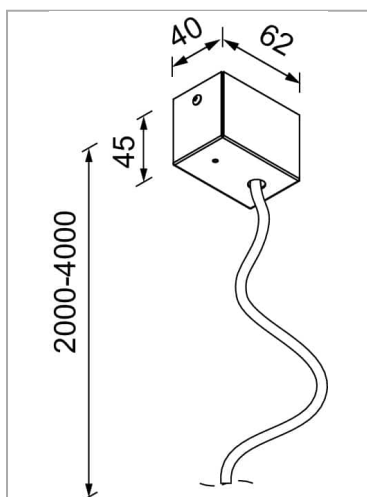

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

### PRODUCT SPECS

|                     |                |
|---------------------|----------------|
| Installation method | system         |
| Finishing           | White          |
| Weight              | 0.26 Kg        |
| Dimension           | L4xW2000xH1 mm |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

