

Silicone lighting module Nanofile system

code NN05840.misura




PRODUCT DESCRIPTION

Modular system for diffused outdoor lighting, composed of empty profiles in anodized extruded aluminum available in predefined lengths, trimless recessed version. Side end caps with Light Proof system. To be completed with silicone light element complete with LED linear sources and with 24V power supply to be installed remotely. IP67.

PRODUCT SPECS

Installation method	Trimless recessed, system
Light source	Linea Led
Absorbed power	48 W
Color temperature	4000K
Color rendering index CRI	>80
Luminous flux of the product	3300 lm
Luminous efficiency	69 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	mm
IP Grade	IP67
Power supply/Transformer	Not included
Protocol	See power supply

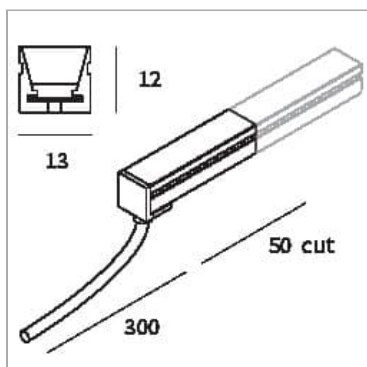

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

