

## Silicone lighting module Nanofile system

code NN05.840




### PRODUCT DESCRIPTION

curvature radius 60 mm

### PRODUCT SPECS

|                              |                           |
|------------------------------|---------------------------|
| Installation method          | Trimless recessed, system |
| Light source                 | Linea Led                 |
| Absorbed power               | 48 W                      |
| Color temperature            | 4000K                     |
| Color rendering index CRI    | >80                       |
| Luminous flux of the product | 3300 lm                   |
| Luminous efficiency          | 69 lm/W                   |
| Protocol                     | On/Off                    |
| Energy efficiency class      | D                         |
| Dimension                    | L5000 mm                  |
| IP Grade                     | IP67                      |
| Power supply/Transformer     | Not included              |
| Protocol                     | See power supply          |

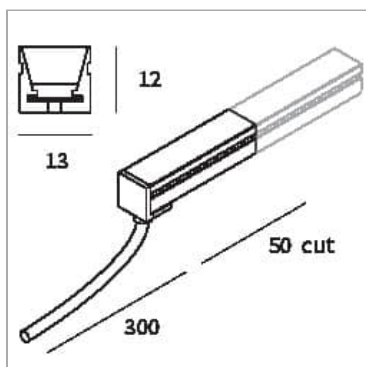

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 2

