
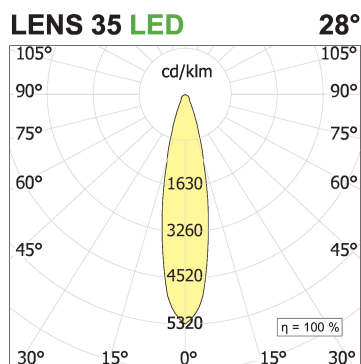
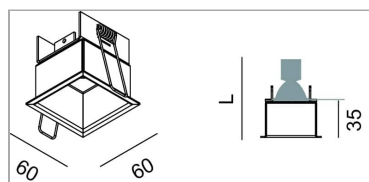
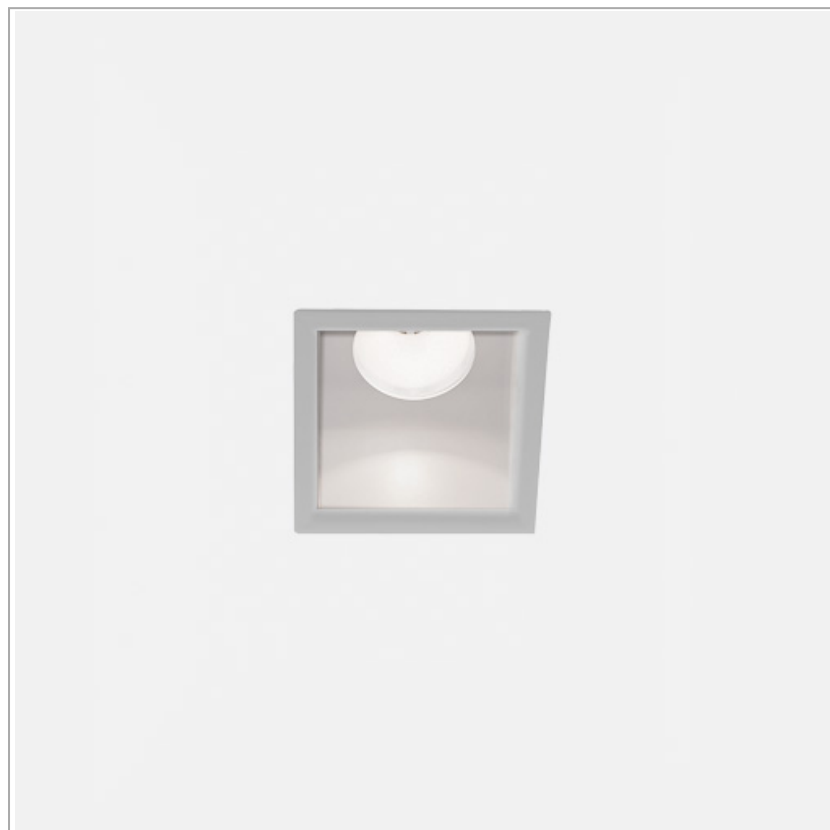


Miniframe Recessed 35

code LT4102.940F/01



PRODUCT DESCRIPTION

Recessed downlight for wall and ceiling installation, for integrated LED source or for halogen/LED QR-CB 35, QR-CB 51, QR-LP 111 12V/230V and QPAR16. Remote power-supply available as an accessory. Body and super-slim 5 mm width frame in painted metal. It can also be installed in concrete or brick walls through specific galvanized steel wall-box, available as an accessory. Degree of protection IP20/IP23.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	5 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 22°
Finishing	White
Luminous flux of the product	628 lm
Luminous efficiency	126 lm/W
MacAdam color tolerance	2
Life time estimate	50000h L90 B10 ta 25°C
Protocol	On/Off
Energy efficiency class	D
Dimension	H110 mm
Hole size	52X52 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Wallbox Wallbox miniframe 35



code LT4101.CC

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article MINIFRAME 50

Technical Sheet

