

Window Frame 306

code WI011.927/01




PRODUCT DESCRIPTION


Recessed wall or ceiling luminaire for indoor diffuse lighting. Installation by means of plasterboard, or by means of its galvanised sheet metal formwork for concrete. Professional LED modules 12.4 W 2700°K. Remote ballast to be integrated. Colour white. Degree of protection IP20.

PRODUCT SPECS

Installation method	Recessed with frame, Wall surface mounted
Light source	LED
Absorbed power	12,4 W
Color temperature	2700K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	759 lm
Luminous efficiency	61 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Dimension	L224xW80xH466 mm
Hole size	290X208 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

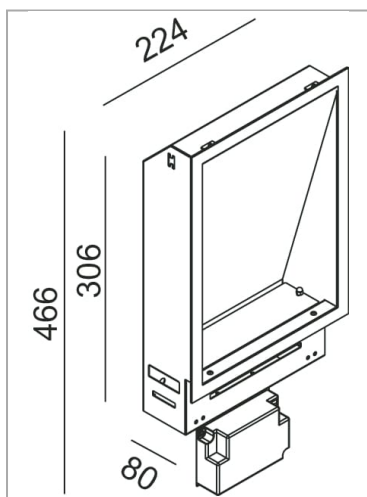

WINDOW LED

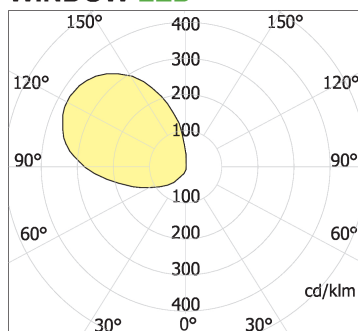

WEB PAGE




ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Wallbox Window Wallbox for Window 306



code LT1693

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article WINDOW 306

Technical Sheet



AE350.16C (Copia)



code AE350.15C

Electronic power supply current