

## Ci 35 Swivel

code LT1163.930F/01





### PRODUCT DESCRIPTION

Round recessed spotlight. Wall/ceiling appliance.  
Adjustable optic

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Recessed with frame    |
| Light source                 | LED                    |
| Absorbed power               | 5 W                    |
| Color temperature            | 3000K                  |
| Color rendering index CRI    | >90                    |
| Optic                        | Flood 22°              |
| Finishing                    | White                  |
| Luminous flux of the product | 619 lm                 |
| Luminous efficiency          | 124 lm/W               |
| MacAdam color tolerance      | 2                      |
| Life time estimate           | 50000h L90 B10 ta 25°C |
| Energy efficiency class      | D                      |
| Weight                       | 0.12 Kg                |
| Dimension                    | H70 Ø64 mm             |
| Hole size                    | Ø 56 mm                |
| IP Grade                     | IP20                   |
| Protection Class             | Class III appliance    |
| Product Spec                 | Circular shape         |
| Power supply/Transformer     | Not included           |
| Protocol                     | See power supply       |

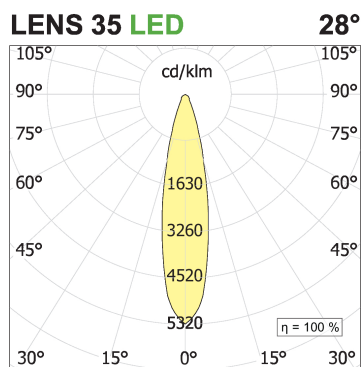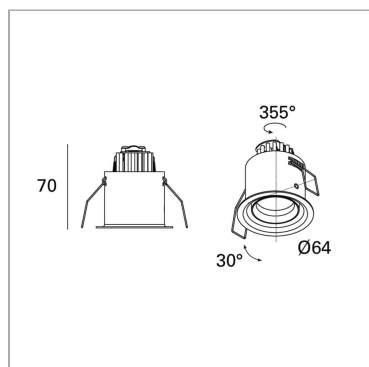

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Wallbox Wallbox CI35 e CI35/35F



code LT9061

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article CI35 and CI35F

Technical Sheet

