
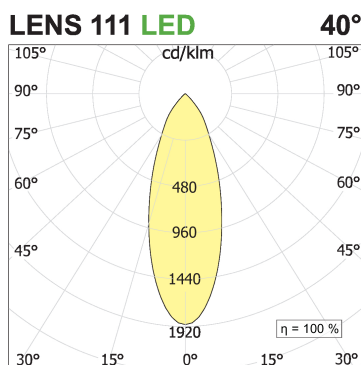


## Nyx Frame Directional TF111D for plasterboard

code NF070.930W/01

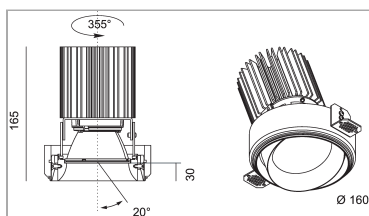

### PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accentor diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Recessed with frame          |
| Light source                 | LED                          |
| Absorbed power               | 24,3 W / 32 W                |
| Color temperature            | 3000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Wide 40°                     |
| Finishing                    | White                        |
| Luminous flux of the product | 2814 lm / 3516 lm            |
| Luminous efficiency          | 116 lm/W / 110 lm/W          |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class      | E                            |
| Weight                       | 1.65 Kg                      |
| Dimension                    | H165 Ø160 mm                 |
| Hole size                    | 154 mm                       |
| IP Grade                     | IP20/54                      |
| Protection Class             | Class III appliance          |
| Product Spec                 | Circular shape               |
| Power supply/Transformer     | Not included                 |
| Protocol                     | See power supply             |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

## OPTIONAL ACCESSORIES

### **Accessori Lens Ø 111 Satin lens Ø 111**




code L111S

uncategorized

Technical Sheet



### **Accessori Lens Ø 111 Elissoidal lens Ø 111**




code L111E

uncategorized

Technical Sheet



### **Accessori Lens Ø 111 Asymmetric lens Ø 111**




code L111A

uncategorized

Technical Sheet



### **Accessori Lens Ø 111 Honey cmb louver Ø 111**



code L111R

uncategorized

Technical Sheet



