
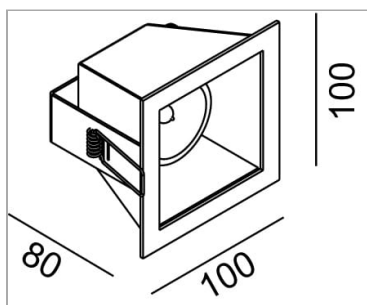


Incas 90

code IN90.930S/01

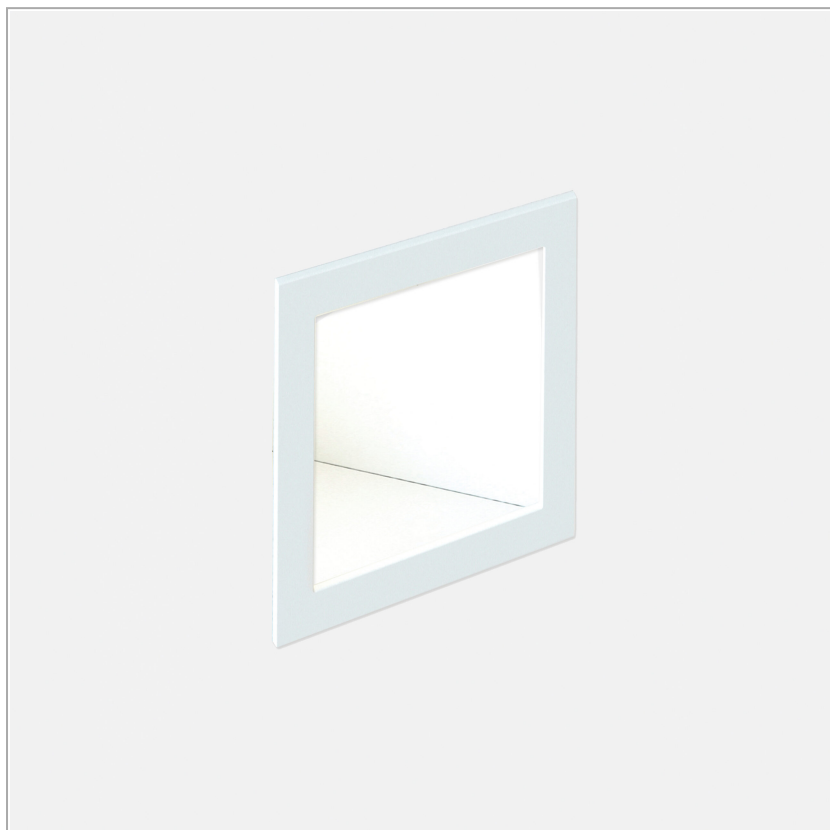

PRODUCT DESCRIPTION

Fixed recessed luminaire for accent lighting. Body and rebate frame metal painted in white colour. It can also be installed in concrete or brick walls and ceilings by means of a galvanised sheet metal formwork available as an accessory. Complete with LED lamp 5 W. Protection class IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	5 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	465 lm
Luminous efficiency	93 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Dimension	L80xW100x100 mm
Hole size	92X90 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE




ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Frosted glass diffuser




code VT/IN45.90

Collection of recessed fixture designed with square frame. Mount different light sources: halogen 12V, 230V or 1W 3W LED. Direct light or diffused light thanks to an optional frosted glass. 90 and 45 indicate the angle of light: 90° for INCAS 90 and INCAS 90 MICRO and 45° for INCAS 45 and INCAS 45 MICRO. Available steel housing for brick walls.

Technical Sheet



Accessori Wallbox Wallbox incas 90 – 45



code CC94

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article INCAS 90,45.

Technical Sheet



