

**Incas 45 micro**


code IN93L2/01

**PRODUCT DESCRIPTION**

Fixed recessed luminaire for accent lighting. Body and rebate frame metal painted in white colour. It can also be installed in concrete or brick walls and ceilings by means of a galvanised sheet metal formwork available as an accessory. Complete with LED lamp 1.5 W. Protection class IP20.

**PRODUCT SPECS**

|                           |                        |
|---------------------------|------------------------|
| Installation method       | Recessed with frame    |
| Light source              | LED                    |
| Absorbed power            | 1,5 W                  |
| Color rendering index CRI | >90                    |
| Finishing                 | White                  |
| MacAdam color tolerance   | 3                      |
| Life time estimate        | 50000h L80 B10 ta 25°C |
| Energy efficiency class   | E                      |
| Dimension                 | L60xW62x62 mm          |
| Hole size                 | 54X54 mm               |
| IP Grade                  | IP20                   |
| Protection Class          | Class III appliance    |
| Power supply/Transformer  | Not included           |
| Protocol                  | See power supply       |

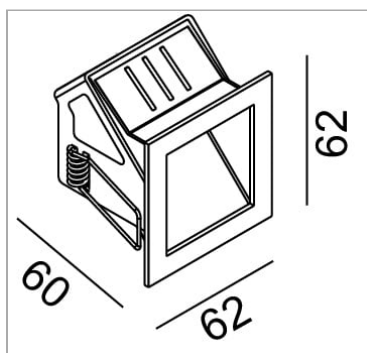**WEB PAGE****ASSEMBLY INSTRUCTIONS**

## **MANDATORY ACCESSORIES**

### **Accessori Frosted glass diffuser**




code VT/IN92

Diffuser of glass studied for all the model of series INCAS 45 MICRO-INCAS 90 MICRO.

**Technical Sheet**



### **Accessori Wallbox Wallbox incas 90 – 45 micro**



code CC94M

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article INCAS 90 MICRO,45 MICRO.

**Technical Sheet**



