


Manine spot Wall double emission

code LT7300.830S/01


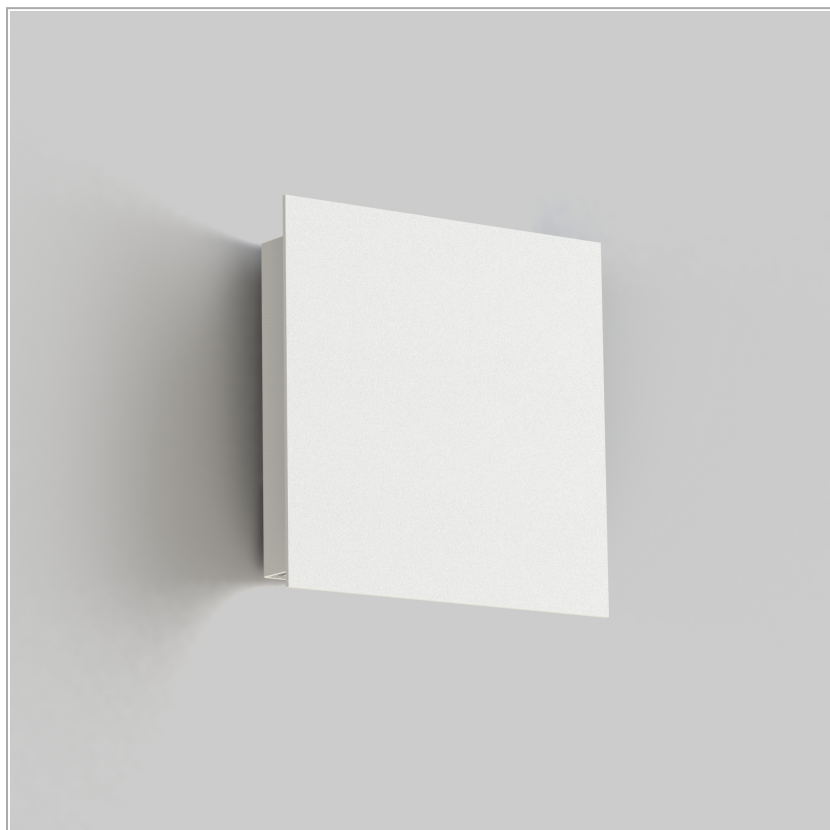


PRODUCT DESCRIPTION

Indoor wall luminaire, bi-emission for diffuse lighting. Complete optical unit with professional LED sources 6 W, complete with ballast. Metal body 120x120 mm, wall projection 30 mm colour white. IP40 degree of protection.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	4x1,5 W
Color temperature	3000K
Color rendering index CRI	80
Optic	Spot 14°
Finishing	White
Luminous flux of the product	368 lm
Luminous efficiency	61 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L80 B10 ta 25°C
Energy efficiency class	D
Weight	0.56 Kg
Dimension	L120xH120 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

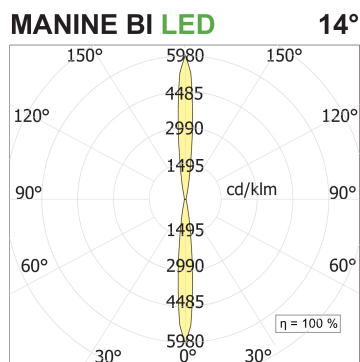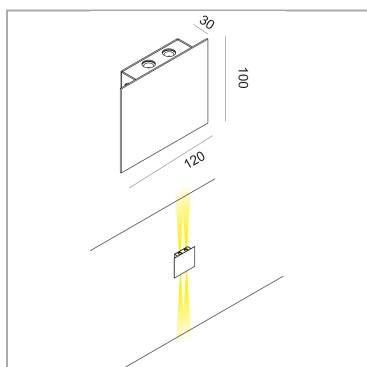

WEB PAGE



ASSEMBLY INSTRUCTIONS

