

## Ipipedi Suspension R55S

code PP152.940FDF/01





### PRODUCT DESCRIPTION

x

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Suspension                  |
| Light source                 | LED                         |
| Absorbed power               | 18 W                        |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 1603 lm                     |
| Luminous efficiency          | 89 lm/W                     |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Protocol                     | Dimmable Trailing Edge      |
| Energy efficiency class      | D                           |
| Weight                       | 1.26 Kg                     |
| Dimension                    | H300 Ø55 mm                 |
| IP Grade                     | IP20                        |
| Power supply                 | 220-240V 50-60Hz            |

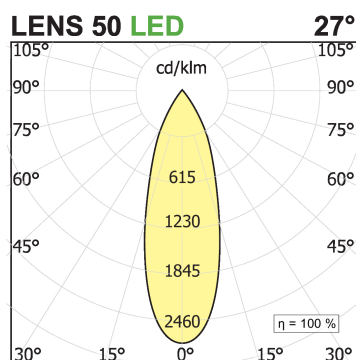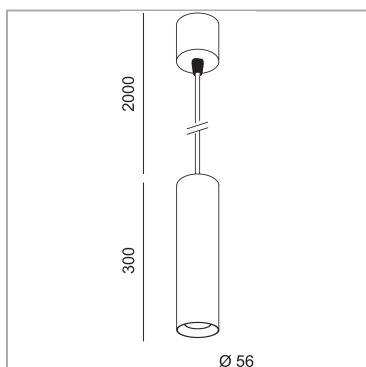

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

