
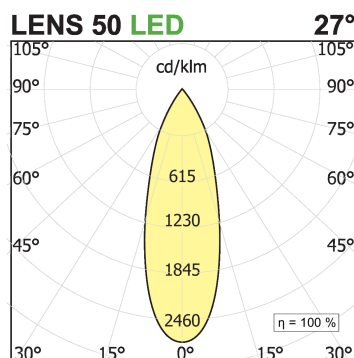
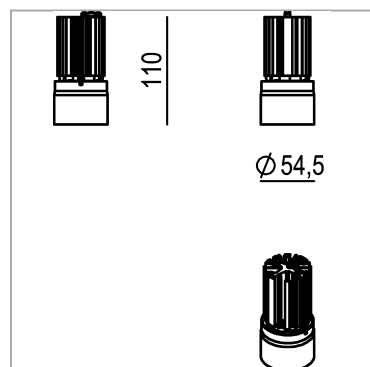


## Nyx Frame TF50D Directional for plasterboard

code NF033.927F/01

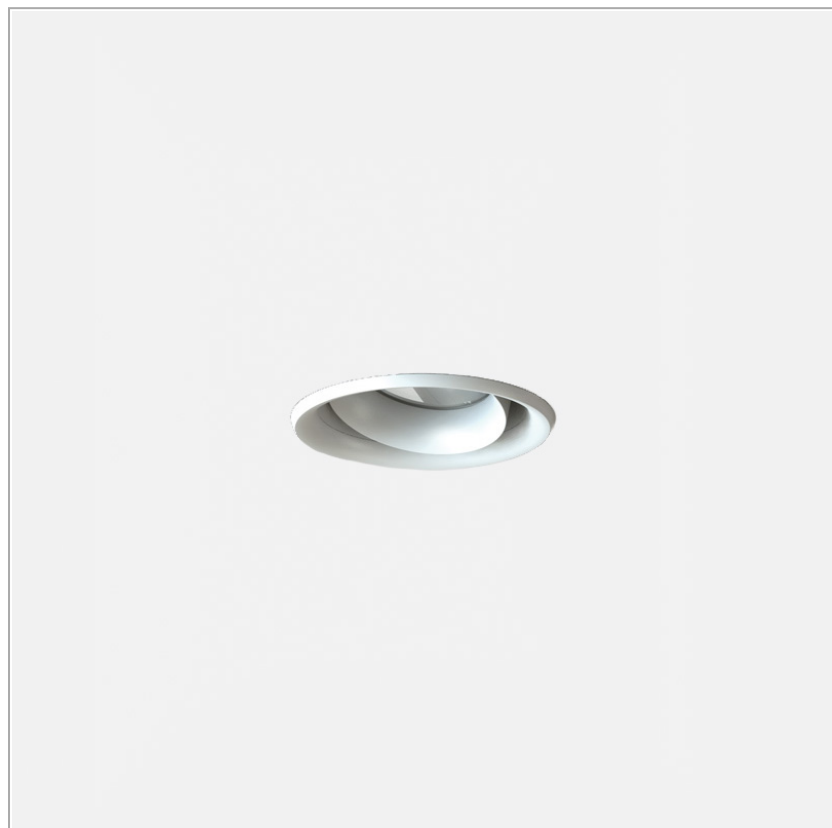

### PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accent or diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 12 W / 18 W                 |
| Color temperature            | 2700K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 1261 lm / 2165 lm           |
| Luminous efficiency          | 105 lm/W / 120 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.35 Kg                     |
| Dimension                    | H110 Ø54.5 mm               |
| Hole size                    | 85 mm                       |
| IP Grade                     | IP20/54                     |
| Protection Class             | Class III appliance         |
| Product Spec                 | Circular shape              |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

## MANDATORY ACCESSORIES

### AE350.16C (Copia)




code AE350.15C

Electronic power supply current

## OPTIONAL ACCESSORIES

### Accessori Lens ø 50 Elissoidal lens Ø 50



code L050E


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens ø 50 Asymmetric lens Ø 50



code L050A


uncategorized

Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens ø 50 Honey comb Ø 50



code L050R

uncategorized

Technical Sheet

