

## Nyx Trimless fixed Q50 - optic group

350

500










# code LTN10K.935S/01

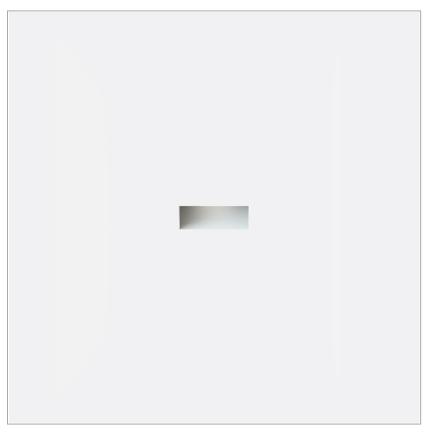


## **PRODUCT DESCRIPTION**

Wall/ceiling recessed lamp, square section, direct light.Possibility to install total recessed or semi recessed

#### **PRODUCT SPECS**

Installation method	Trimless recessed
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	1350 lm / 2394 lm
Luminous efficiency	113 lm/W / 133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.22 Kg
Dimension	H93 Ø60 mm
Hole size	74x74 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Square shape
Power supply/Transformer	Not included
Protocol	See power supply



#### **WEB PAGE**




## **ASSEMBLY**



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

### Accessori Outer Casing Nyxq For False Ceiling Q50 outer casing for plasterbord




code LTN02A/01

Trimless recessed indoor outer casing for plasterboard. Bianco finishing outer casing for plasterboard



## Accessori Wallbox Nyx For Brickwall Q50 outer casing for brick wall



#### code LTN02B/01

Trimless recessed indoor outer casing for plasterboard square shape. Bianco finishing outer casing for plasterboard



### AE350.16C (Copia)



#### code AE350.15C

Electronic power supply current

#### AE500.20C1



## code AE500.20C1

Electronic power supply current