

**Nyx Trimless fixed T50F - optic group**

code LTN89K.940W/01





**PRODUCT DESCRIPTION**

Wall/ceiling recessed lamp, round section, direct light.  
Possibility to install total recessed or semi-recessed

**PRODUCT SPECS**

Installation method	Trimless recessed
Light source	LED
Absorbed power	8 W / 12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 46°
Finishing	White
Luminous flux of the product	1064 lm / 1337 lm
Luminous efficiency	133 lm/W / 111 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H90 Ø55 mm
Hole size	Ø 75 mm
IP Grade	IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

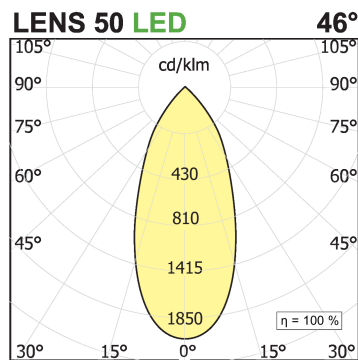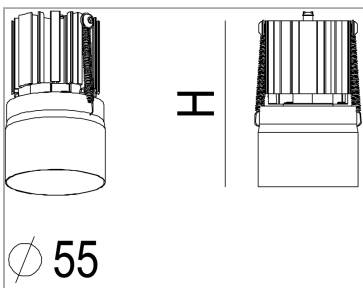

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**



## MANDATORY ACCESSORIES

### Outer Casing Nyx T50 and T35D trimless for false ceiling

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.



code LTN04A


Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.

Technical Sheet



### Frame Nyx For Brickwall T35D e T50F outer casing box for brick wall

Frame for brick wall for Nyx T35D e T50F.



code LTN04B

Frame for brick wall for Nyx T35D e T50F.

Technical Sheet



### AE350.16C (Copia)



code AE350.15C

Electronic power supply current

### AE500.20C1



code AE500.20C1

Electronic power supply current