


2BO1 suspension

code IC1401

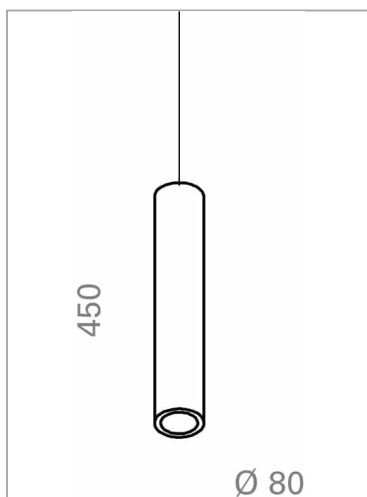

PRODUCT DESCRIPTION

Direct light suspension appliance for interior lighting, for QPAR16 GU10 230/240V LED or halogen max 50W lamps. Body in VFRC (vinilic fiber reinforced concrete) with "smoothed concrete" hand-crafted finishing. Transparent suspension cable 2000 mm. Degree of protection IP20.

PRODUCT SPECS

Installation method	Suspension
Light source	GU10
Absorbed power	max 50 W
Color rendering index CRI	Depending on the bulb (not included)
Luminous flux of the product	Depending on the bulb (not included)
Luminous efficiency	Depending on the bulb (not included)
Energy efficiency class	E-G
Weight	2.96 Kg
Dimension	H450 Ø80 mm
IP Grade	IP20

WEB PAGE



ASSEMBLY INSTRUCTIONS



