

Pastorale Outdoor

code IC310.830




PRODUCT DESCRIPTION

LED floor luminaire, for street furniture and orientation and service lighting. Body in CementoPiuma, lightweight fibreglass concrete H350mm, with "smooth cement" finish made by hand. Aluminium optical unit complete with 8W LED source, integrated electronic power supply. Voltage In 220/240V 50/60hz and steel mounting plate for ground fixing, with anti-theft lock. Degree of protection IP65. ATTENZIONE: Small imperfections, voids, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Luminous flux of the product	758 lm
Luminous efficiency	95 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	8 Kg
Dimension	L200xW200xH350 mm
IP Grade	IP65
Power supply	220-240V 50-60Hz

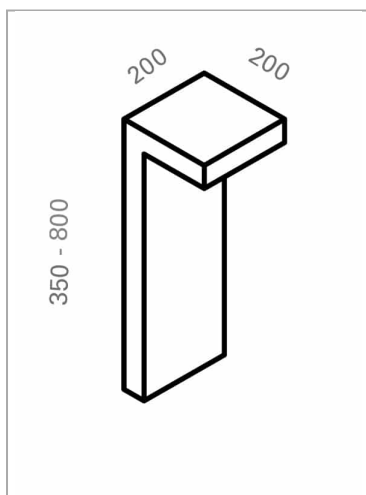

WEB PAGE



ASSEMBLY INSTRUCTIONS



