


## Zero51 ceiling

code IC210.830



### ZERO51 LED

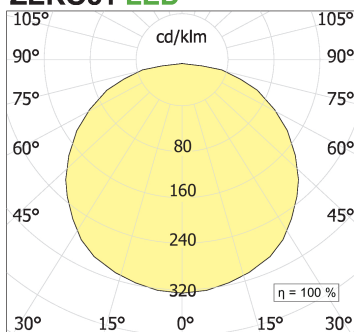

### PRODUCT DESCRIPTION

LED ceiling light. Body in CementoPiuma®, lightweight fibrous cement, with hand-made "smooth concrete" finish, diameter 700 mm. 48W LED light unit, integrated electronic power supply. Voltage In 220/240V 50/60Hz. Protection degree IP30. WARNING: This product has been realized with hand crafted procedures and not industrial. Small imperfections, voids, subsidence and ripples of the surface are deliberately present and they are a feature of the product, proving the hand-made manufacturing procedure.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Ceiling surface mounted         |
| Light source                 | LED                             |
| Absorbed power               | 48 W                            |
| Color temperature            | 3000K                           |
| Color rendering index CRI    | 80                              |
| Luminous flux of the product | 3358 lm                         |
| Luminous efficiency          | 70 lm/W                         |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | On/Off                          |
| Energy efficiency class      | E                               |
| Weight                       | 17 Kg                           |
| Dimension                    | H150 Ø700 mm                    |
| IP Grade                     | IP30                            |
| Product Spec                 | Circular shape                  |
| Power supply                 | 220-240V 50-60Hz                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



