


## Brique O wall Outdoor

code IC811.827

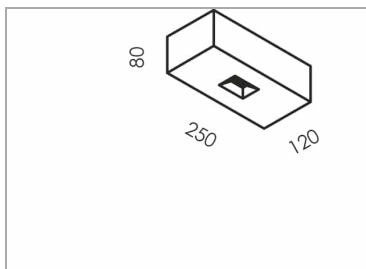

### PRODUCT DESCRIPTION

Wall appliance for interior and outdoor lighting, for LED source lamps, available in monoemission and bi-emission versions. Body in VFRC (vinilic fiber reinforced concrete) with "smoothed concrete" hand-crafted finishing. Aluminium optical unit complete with 8/16W LED source (720/1480 lumens fed at 500mA), 50/60Hz 230/240V built-in electronic driver, steel mounting plate for fixture to the wall. Degree of protection IP65.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Wall surface mounted            |
| Light source                 | LED                             |
| Absorbed power               | 2x8 W                           |
| Color temperature            | 2700K                           |
| Color rendering index CRI    | >90                             |
| Luminous flux of the product | 1494 lm                         |
| Luminous efficiency          | 93 lm/W                         |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | On/Off                          |
| Energy efficiency class      | D                               |
| Weight                       | 3 Kg                            |
| Dimension                    | L250xW120xH80 mm                |
| IP Grade                     | IP65                            |
| Power supply                 | 220-240V 50-60Hz                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



