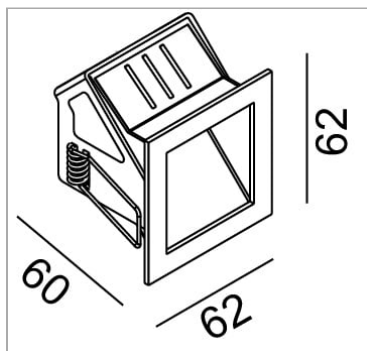
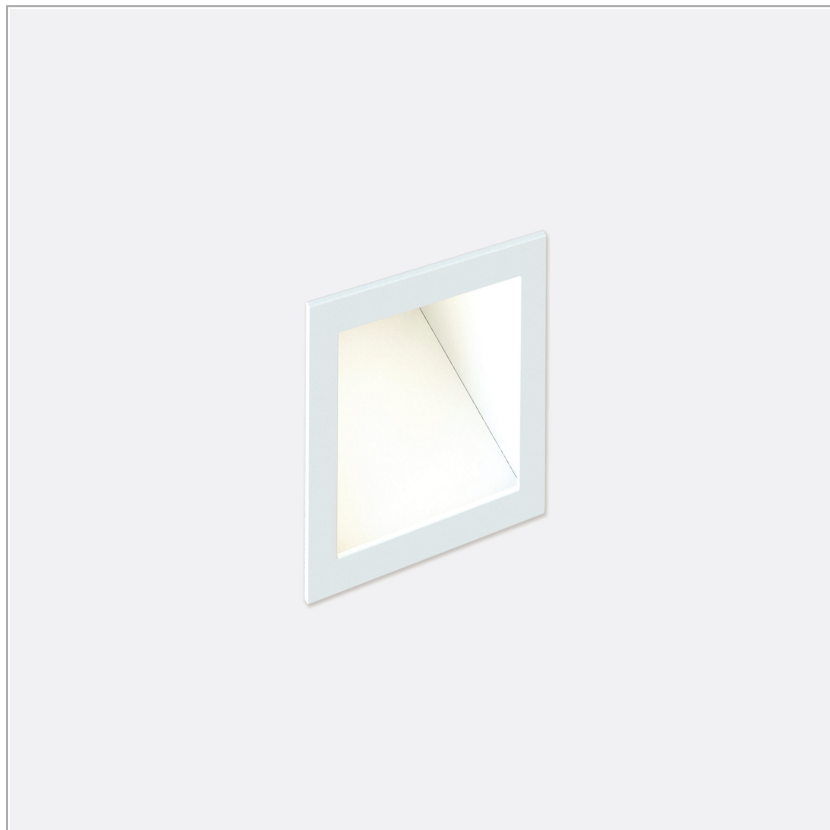


Incas 45 micro GY6,35

code IN93/01

**PRODUCT DESCRIPTION**

Fixed recessed luminaire for accent lighting. Body and rebate frame metal painted in white colour. It can also be installed in concrete or brick walls and ceilings by means of a galvanised sheet metal formwork available as an accessory. Protection class IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	QT12-LP
Absorbed power	max 35 W
Finishing	White
Energy efficiency class	BC
Dimension	L60xW62x62 mm
Hole size	54X54 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE**ASSEMBLY INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

Accessori Frosted glass diffuser




code VT/IN92

Diffuser of glass studied for all the model of series INCAS 45 MICRO-INCAS 90 MICRO.

Technical Sheet



Accessori Wallbox Wallbox incas 90 – 45 micro



code CC94M

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article INCAS 90 MICRO,45 MICRO.

Technical Sheet

