

Leva Quadra Wall/ceiling Q9 adjustable

code LV316.927S/01




PRODUCT DESCRIPTION

Fix and adjustable projectors family with chip on board LED sources. Mounting options: recessed, with frame or trimless, ceiling and wall-mounted and on 48V tracks, such as the Multi System by Stucchi. Fixture's body in painted extruded aluminum. Optical group complete with CRI>90 chip on board led, lens, antiglare housing and electronic driver (except for recessed versions). The optical group is fixed in the recessed version and adjustable (0-90° on the horizontal axis and 355° on the vertical axis) in the surface-mounted and track versions. Spot, flood and wide optics. UGR<19. Degree of protection IP20/40.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	9x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 20°
Finishing	White box - black optic
Luminous flux of the product	1783 lm
Luminous efficiency	90 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	0.90 Kg
Dimension	L98xW98xH90 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

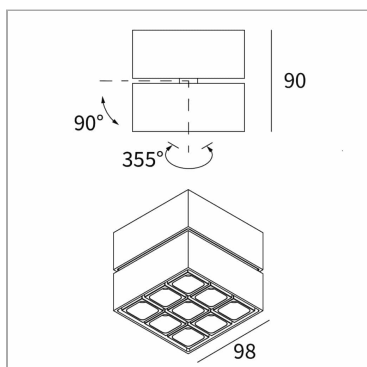

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

