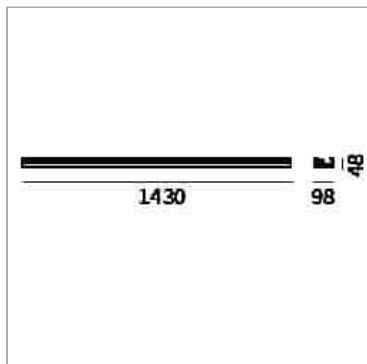


**File Pro System - Suspension  
modules**

code FP026.930EWD/01

**PRODUCT DESCRIPTION**

Modular system, in extruded aluminum 98x48mm, suspended or on electrified three-phase track to be completed with the necessary dedicated accessories. Embossed painted finish. Screens for diffused light in opal polycarbonate, professional optics with different beam openings. They might be equipped, if necessary, with soundabsorbing panels in different colors and materials. IP

Dimmable Dali / Touch &amp; Dimm

**PRODUCT SPECS**

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | system                          |
| Light source                 | LED pro                         |
| Absorbed power               | 82 W                            |
| Color temperature            | 3000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Extra wide 110                  |
| Finishing                    | White                           |
| Luminous flux of the product | 13000 lm                        |
| Luminous efficiency          | 159 lm/W                        |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | Dimmable Dali / Touch & Dimm    |
| Energy efficiency class      | D                               |
| Weight                       | 4.7 Kg                          |
| Dimension                    | L98xW1430xH48 mm                |
| IP Grade                     | IP20                            |
| Power supply                 | 220-240V 50-60Hz                |

**WEB PAGE****ASSEMBLY  
INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1