

## App-eal 230V

code APEB2/01





### PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Wall surface mounted |
| Light source                 | Led                  |
| Absorbed power               | 23 W                 |
| Color temperature            | 4000K                |
| Color rendering index CRI    | >90                  |
| Finishing                    | White                |
| Luminous flux of the product | 1920 lm              |
| Luminous efficiency          | 83 lm/W              |
| MacAdam color tolerance      | 3                    |
| Energy efficiency class      | D                    |
| Weight                       | 1.5 Kg               |
| Dimension                    | L310xW100xH110 mm    |
| IP Grade                     | IP40                 |
| Power supply                 | 220-240V 50-60Hz     |

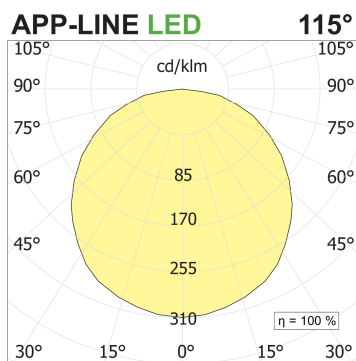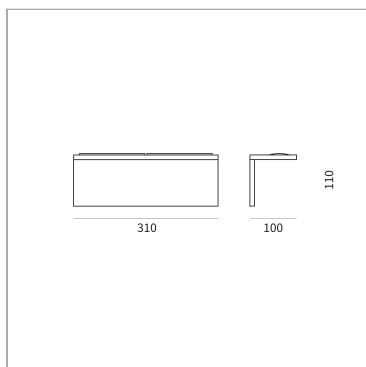

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

