



**Flik Flok System -  
Profile+diffuser+brakets Flok**

code FF0A.1000/01

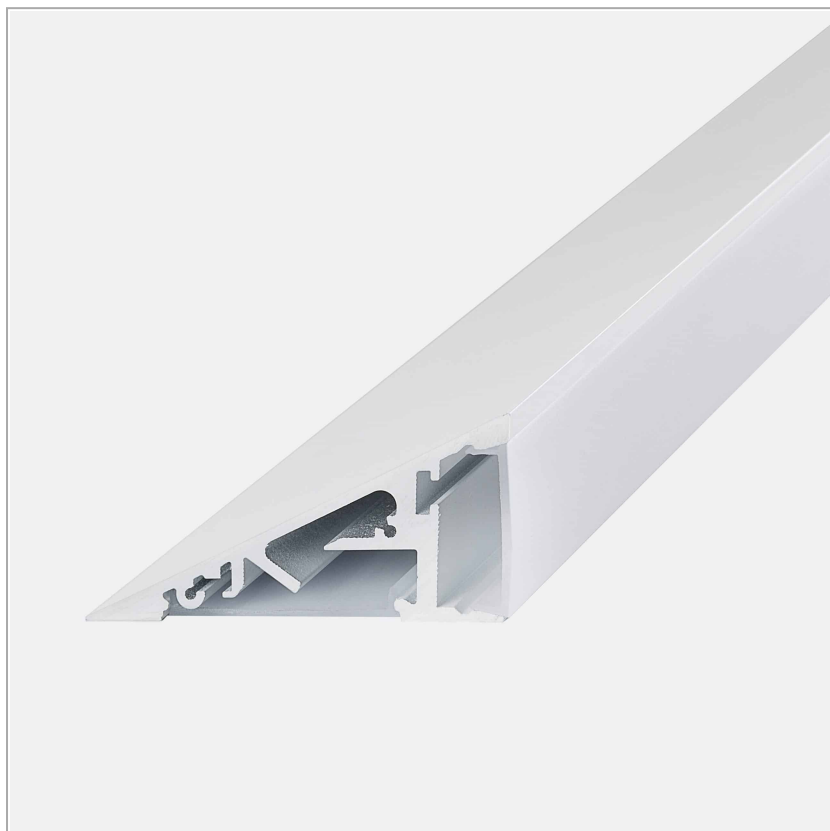

**PRODUCT DESCRIPTION**

system indoor profile. White finishing profile

**PRODUCT SPECS**

|                     |          |
|---------------------|----------|
| Installation method | system   |
| Finishing           | White    |
| Dimension           | L1000 mm |

**WEB PAGE**



## OPTIONAL ACCESSORIES

### Flik Flok System – Profile+diffuser+brakets Flik



code FF0B.1000/01

system indoor profile. Bianco finishing profile

Technical Sheet



code FF0B.2000/01

system indoor profile. Bianco finishing profile

Technical Sheet



code FF0B.3000/01

system indoor profile. Bianco finishing profile

Technical Sheet



code FF0B.misura/01

system indoor profile. Bianco finishing profile

Technical Sheet



### Flik Flok System – Couple of closure heads



code FFTP/01

Wall-mounted modular system for direct or indirect lighting, made of painted empty extruded aluminium profiles complete with opal white polycarbonate diffusers, available in predefined lengths or cut to measure. Double installation possibility: if fixed by the narrow side, the lighting effect is diffused, if fixed instead by the wide side, the lighting is grazing. To be completed with LED strips, driver (to be installed remote), Light Proof closure heads and linear and angular joints. Degree of protection IP40, IP65.

Technical Sheet



### Straight connector couple



code LT2013

Couple of connector to put straight elements together

Technical Sheet




Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

## Flik – Flok System Angle connector couple



code FFGA

Wall-mounted modular system for direct or indirect lighting, made of painted empty extruded aluminium profiles complete with opal white polycarbonate diffusers, available in predefined lengths or cut to measure. Double installation possibility: if fixed by the narrow side, the lighting effect is diffused, if fixed instead by the wide side, the lighting is grazing. To be completed with LED strips, driver (to be installed remote), Light Proof closure heads and linear and angular joints. Degree of protection IP40, IP65.

Technical Sheet

