

Leva 10 trimless recessed - kit

code LV010K.927F/01



















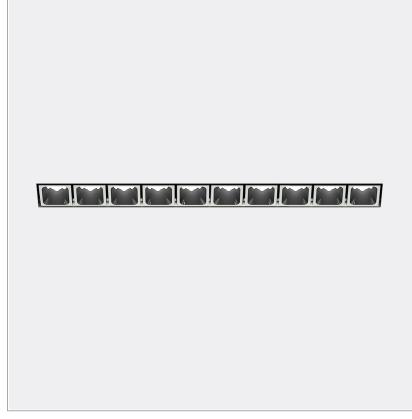

T T



PRODUCT DESCRIPTION

Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical units complete with LED chip on board, lens, anti-glare housing. Optics 32° UGR<16. Degree of protection IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	10x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White
Luminous flux of the product	1845 lm
Luminous efficiency	84 lm/W
MacAdam color tolerance	2
Life at a state of	
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	50000h Ta 25° L90B10 E
Energy efficiency class	E
Energy efficiency class Weight	E 0.20 Kg
Energy efficiency class Weight Dimension	E 0.20 Kg L300xW27xH60 mm
Energy efficiency class Weight Dimension Hole size	E 0.20 Kg L300xW27xH60 mm 32X306 mm
Energy efficiency class Weight Dimension Hole size IP Grade	E 0.20 Kg L300xW27xH60 mm 32X306 mm IP20
Energy efficiency class Weight Dimension Hole size IP Grade Protection Class	E 0.20 Kg L300xW27xH60 mm 32X306 mm IP20 Class III appliance
Energy efficiency class Weight Dimension Hole size IP Grade Protection Class Product Spec	E 0.20 Kg L300xW27xH60 mm 32X306 mm IP20 Class III appliance Rectangular shape

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Box Leva 10 trimless



code LV010A

Trimless recessed uncategorized wallbox for false ceiling



AE700.32C1.MP



code AE700.32C1.MP

Electronic power supply current

OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete - Leva10



code CCLV10

Formwork for masonry and concrete, suitable for Leva10. Internal length 307mm - external length 309 4mm

