

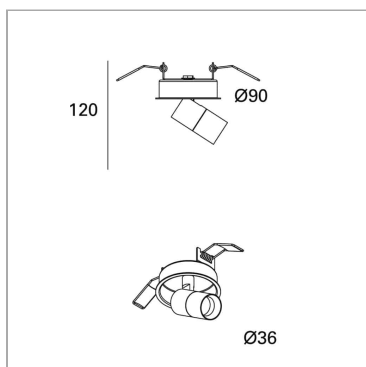


Focus B 36 cup

code FS302.930F/01



PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, cup base; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, ellipsoid lens, asymmetric lens, satined lens. Color finish white.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 28°
Finishing	White
Luminous flux of the product	695 lm
Luminous efficiency	87 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H120 Ø36 mm
Hole size	Ø 82 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

AE700.10C



code AE700.10C

Electronic power supply current

OPTIONAL ACCESSORIES

Accessories Focus Minimal counter frame



code FSA01

counterframe minimal for plate and box serie FOCUS 26/36/55

Technical Sheet

