
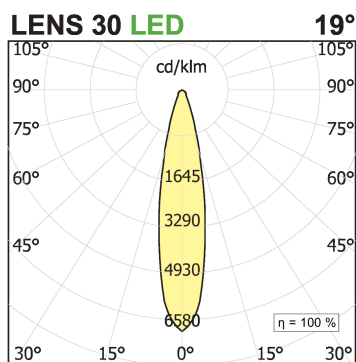
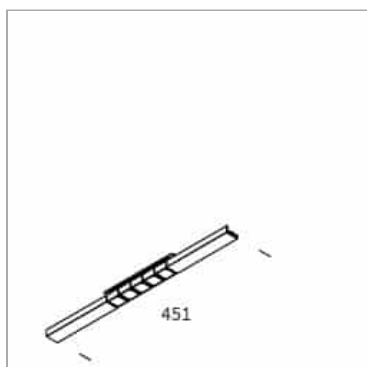


## File Flex sistema - Leva 5 File Flex 24/48V

code FX210.935SD10/01

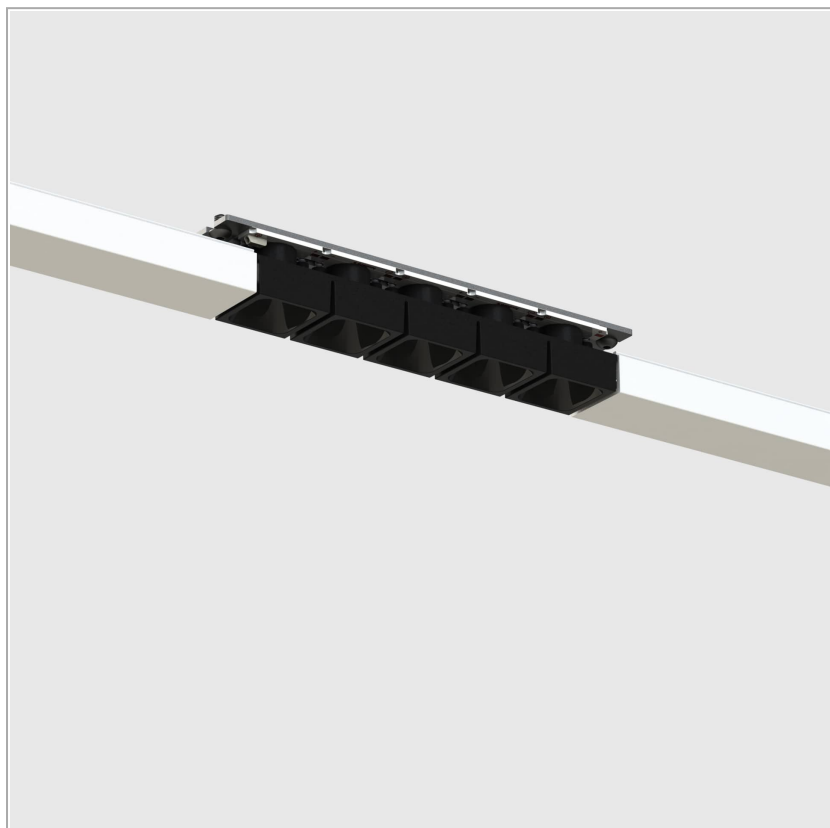

### PRODUCT DESCRIPTION

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | system                  |
| Light source                 | LED                     |
| Absorbed power               | 5x2,2 W                 |
| Color temperature            | 3500K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Spot 20°                |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 1088 lm                 |
| Luminous efficiency          | 99 lm/W                 |
| MacAdam color tolerance      | 3                       |
| Life time estimate           | 60.000H L80 B10         |
| Protocol                     | Dimmable 1-10V          |
| Weight                       | 0.2 Kg                  |
| Dimension                    | L451xW30xH28 mm         |
| IP Grade                     | IP20                    |
| Protection Class             | Class III appliance     |
| Power supply/Transformer     | Not included            |
| Protocol                     | See power supply        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1