

## IFerrosi spot 60 + CBL

code IF31.927F/44C





### PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Wall surface mounted            |
| Light source                 | LED                             |
| Absorbed power               | 6,7 W                           |
| Color temperature            | 2700K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Flood 24°                       |
| Finishing                    | Champagne gold                  |
| Luminous flux of the product | 650 lm                          |
| Luminous efficiency          | 97 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | On/Off                          |
| Energy efficiency class      | D                               |
| Weight                       | 0.8 Kg                          |
| Dimension                    | L130xH200 Ø60 mm                |
| IP Grade                     | Ip66 / Ip66                     |
| Protection Class             | Class III appliance             |
| Power supply                 | 220-240V 50-60Hz                |

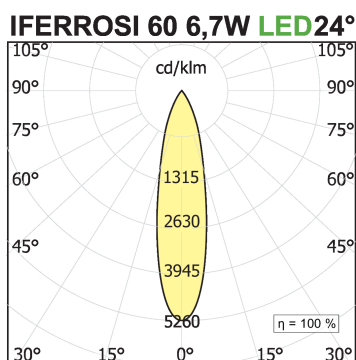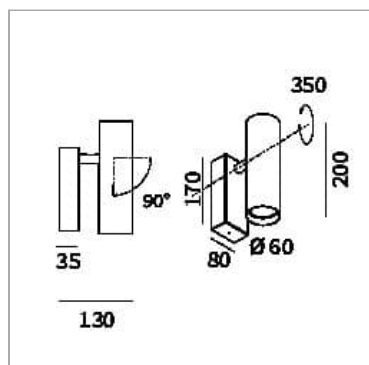

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

