
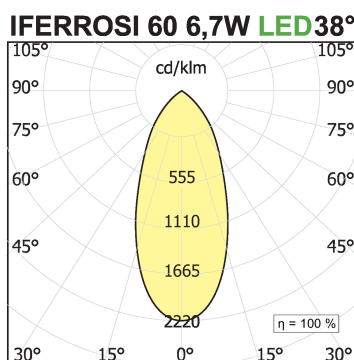


IFerrosi spot 60 + CBL

code IF31.927W/44C

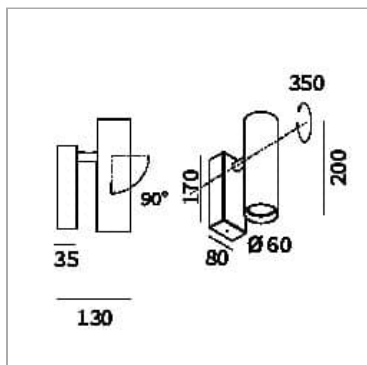

PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	6,7 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Champagne gold
Luminous flux of the product	712 lm
Luminous efficiency	106 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	0.8 Kg
Dimension	L130xH200 Ø60 mm
IP Grade	Ip66 / Ip66
Protection Class	Class III appliance
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1