
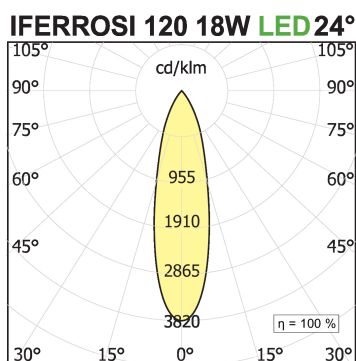


## IFerrosi spot 120

code IF20.940F/44C

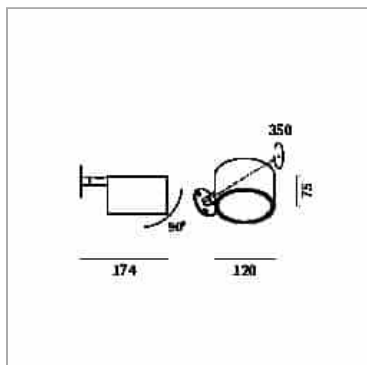

### PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

### PRODUCT SPECS

|                              |                        |
|------------------------------|------------------------|
| Installation method          | Wall surface mounted   |
| Light source                 | LED                    |
| Absorbed power               | 18 W                   |
| Color temperature            | 4000K                  |
| Color rendering index CRI    | >90                    |
| Optic                        | Flood 24°              |
| Finishing                    | Champagne gold         |
| Luminous flux of the product | 1706 lm                |
| Luminous efficiency          | 95 lm/W                |
| Life time estimate           | 50000h L90 B10 Ta 25°C |
| Protocol                     | On/Off                 |
| Energy efficiency class      | D                      |
| Weight                       | 1.3 Kg                 |
| Dimension                    | L174xH75 Ø120 mm       |
| IP Grade                     | Ip66 / Ip66            |
| Protection Class             | Class III appliance    |
| Product Spec                 | Circular shape         |
| Power supply/Transformer     | Not included           |
| Protocol                     | See power supply       |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **AE500.20C1**



code AE500.20C1

Electronic power supply current

