

Optical group Leva Q4 Outdoor

code LV351K.930F/01





PRODUCT DESCRIPTION

Recessed with frame outdoor fixture, complete of 4x led 2,2 w beam 32°, color rendering index>90. White finishing fixture

To be completed with remote driver

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	4x2,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White
Luminous flux of the product	868 lm
Luminous efficiency	99 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	0.2 Kg
Dimension	L61xW61xH33 mm
Hole size	34x96 mm
IP Grade	Ip56
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

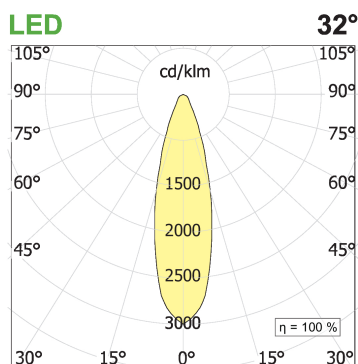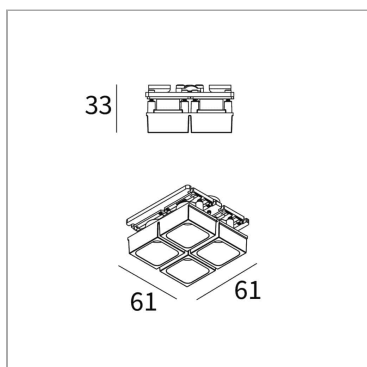

WEB PAGE



MANDATORY ACCESSORY ACCORDING TO THE TYPE OF INSTALLATION

Accessori Wallbox Q4 box frame



code LV301F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling

Technical Sheet



Accessori Wallbox Q4 box minimal



code LV301M

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



MANDATORY ACCESSORIES

AE700.10C



code AE700.10C

Electronic power supply current

IMMAGINE PURAMENTE DIMOSTRATIVA
PURELY DEMONSTRATION IMAGE