


## File H suspension profile with Leva modules

code F1H14.940WD/01

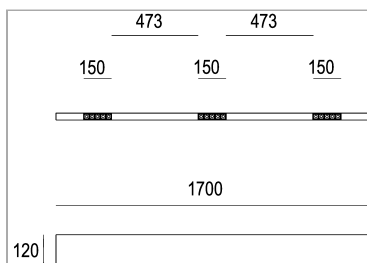

### PRODUCT DESCRIPTION

Direct and indirect light indoor suspension lamp made of extruded aluminum 6060, color rendering index CRI >90. Equipped with 3 groups Lever 5 spot series with high color rendering LED sources; temperature 4000K; fixed optics with aperture ; protocol Dimmable Dali. Lamp with finish: white box - black optic. Degree of protection IP20.Type of ceiling installation.

### PRODUCT SPECS

|                              |                                                           |
|------------------------------|-----------------------------------------------------------|
| Installation method          | Suspension                                                |
| Light source                 | LED                                                       |
| Absorbed power               | 33 W / 38,4 W                                             |
| Color temperature            | 4000K                                                     |
| Color rendering index CRI    | >90                                                       |
| Optic                        | Wide                                                      |
| Finishing                    | White box - black optic                                   |
| Luminous flux of the product | 4900 lm / 6131 lm                                         |
| Luminous efficiency          | 148 lm/W / 160 lm/W                                       |
| MacAdam color tolerance      | 3                                                         |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C / 50000h Ta 25°<br>L80B10 |
| Protocol                     | Dimmable Dali                                             |
| Energy efficiency class      | D                                                         |
| Weight                       | 3.70 Kg                                                   |
| Dimension                    | L1700 mm                                                  |
| IP Grade                     | IP20                                                      |
| Power supply                 | 220-240V 50-60Hz                                          |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

